



# T60M consumable configurations

## Shielded

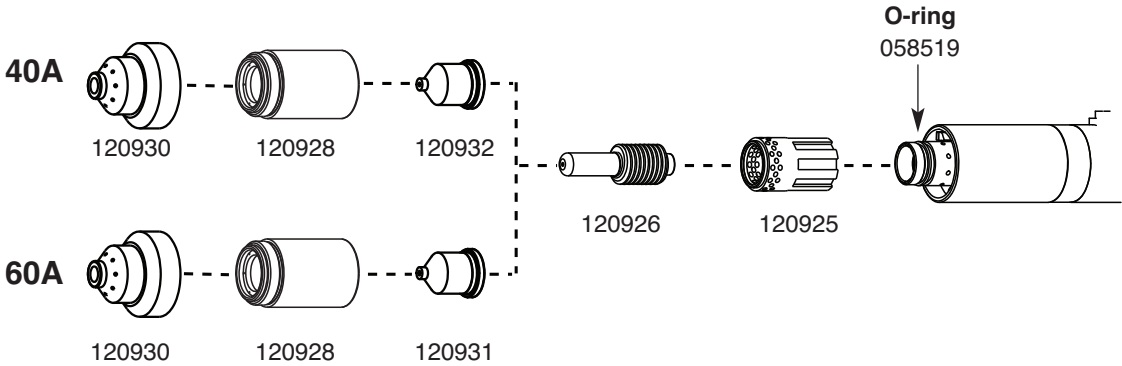

## FineCut

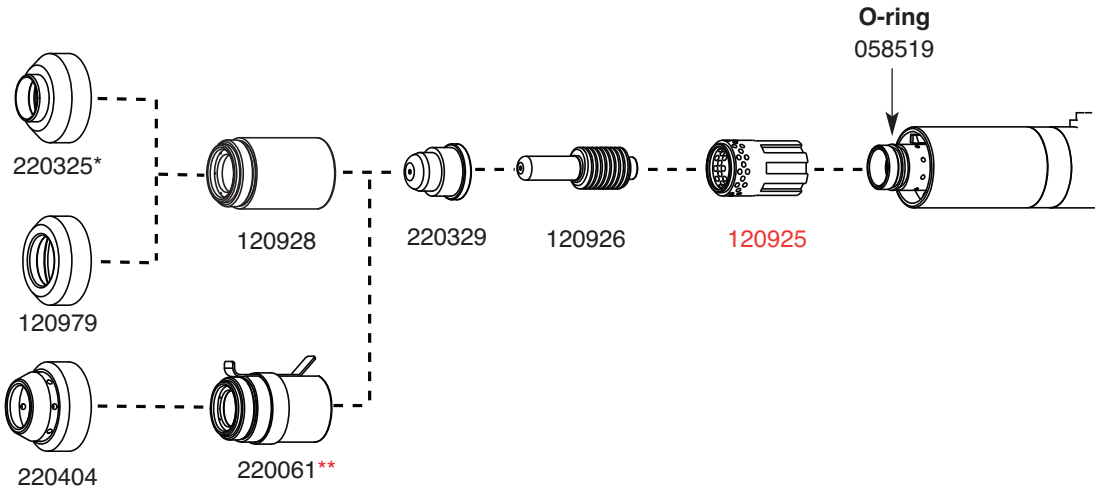


\* For use with CE systems.

\*\* Use an ohmic sensing cap when a compatible torch height controller is installed.

# OPERATION

## FineCut consumables

- Torch-to-work distance for the following cut chart is 0.08 inches (2.032 mm) for mild steel and 0.010 inches (0.254 mm) for stainless steel.

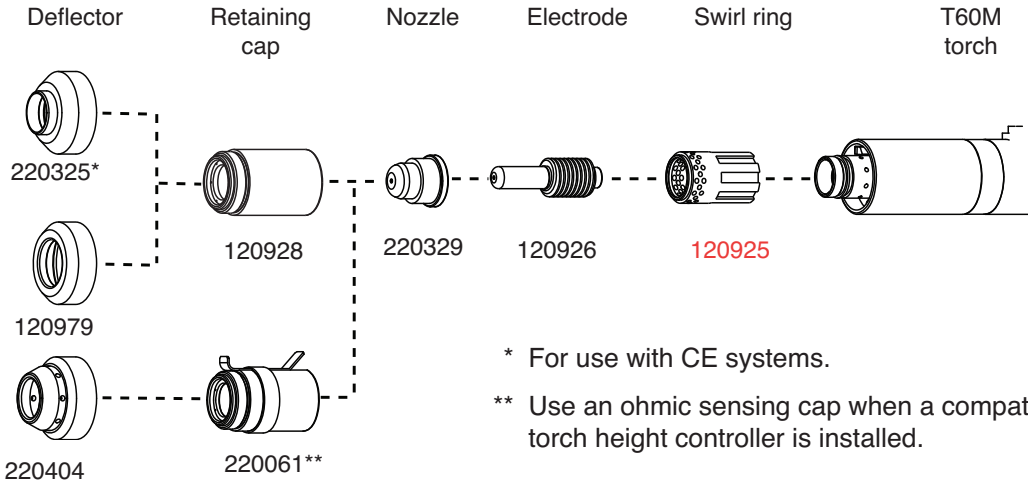

\* For use with CE systems.

\*\* Use an ohmic sensing cap when a compatible torch height controller is installed.

### Mild steel

Arc current	Arc voltage	Material thickness		Approximate travel speeds	
		inches	mm	ipm	mm/min
50	76	<b>10 ga</b>	<b>3.4</b>	90	2286
40	83	<b>10 ga</b>	<b>3.4</b>	50	1270
45	77	<b>12 ga</b>	<b>2.7</b>	120	3048
40	81	<b>12 ga</b>	<b>2.7</b>	70	1778
	79	<b>14 ga</b>	<b>1.9</b>	135	3810
	79	<b>16 ga</b>	<b>1.5</b>	150	3810
	79	<b>18 ga</b>	<b>1.2</b>	150	2540
	78	<b>20 ga</b>	<b>0.9</b>	120	2540
30	80	<b>24 ga</b>	<b>0.6</b>	150	3174

### Stainless steel

Arc current	Arc voltage	Material thickness		Approximate travel speeds	
		inches	mm	ipm	mm/min
50	63	<b>10 ga</b>	<b>3.4</b>	80	1905
40	73	<b>10 ga</b>	<b>3.4</b>	60	1524
45	63	<b>12 ga</b>	<b>2.7</b>	100	3174
40	72	<b>12 ga</b>	<b>2.7</b>	80	1905
	65	<b>14 ga</b>	<b>1.9</b>	150	3810
	64	<b>16 ga</b>	<b>1.5</b>	150	3810
	64	<b>18 ga</b>	<b>1.2</b>	150	3810
	65	<b>20 ga</b>	<b>0.9</b>	150	3810
30	66	<b>24 ga</b>	<b>0.6</b>	150	3810